




Cross recessed pan head machine screws, steel type H (Phillips)

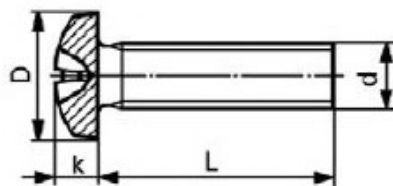


ISO 7045 / DIN 7985

d	M 2		M 2,5		M 3		M 4	
D	4		5		6 ISO 5,6		8	
k	1,6		2 ISO 2,1		2,4		3,1	
m ≈	2,5		2,7		3,1		4,6	
driver size	1		1		1		2	
L quantity	100	1000+	100	1000+	100	1000+	100	1000+
4	4.-	2.30	4.-	2.-	4.-	2.20	8.90	6.50
5	4.-	2.30	4.-	2.10	4.-	2.20	5.-	3.80
6	4.-	2.90	4.-	2.10	4.-	2.20	4.50	2.90
8	4.-	2.90	4.-	2.20	4.-	2.20	4.50	2.90
10	4.-	3.-	4.-	2.30	4.-	2.30	4.50	2.90
12	4.50	3.10	4.-	2.50	4.-	2.40	4.70	3.10
14			5.-	3.-	4.50	2.50	6.-	4.10
16	5.-	3.20	4.50	2.75	4.50	2.50	5.-	3.50
18					5.-	3.20	7.20	4.80
20	5.50	4.-	5.-	3.40	4.50	3.-	7.-	4.50
22					5.-	3.80	8.60	6.30
25			5.50	3.90	5.-	3.90	6.-	4.25
30					6.20	4.-	7.20	5.-
35					7.10	5.30	8.30	5.90
40					11.60	8.40	9.10	6.40
45					13.-	10.20	10.20	7.10
50					14.50	11.70	14.10	10.40
55							18.50	14.90
60					19.70	16.80	17.10	13.60
70							25.-	19.80



Cross recessed pan head machine screws, steel type H (Phillips)

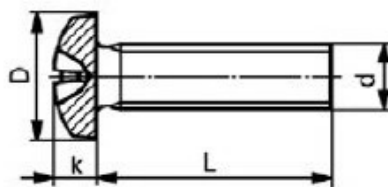

ISO 7045 / DIN 7985

d	M 5		M 6		M 8		M10
D	10 ISO 9,5		12		16		20
k	3,8 ISO 3,7		4,6		6		7,5
m ≈	5,3		6,8		9		10,1
driver size	2		3		4		4
L quantity	100	1000+	100	1000+	100	1000+	100
6	7.50	5.50					
8	6.20	4.40	13.-	10.50			
10	6.20	4.40	9.90	7.20			
12	8.10	5.50	8.80	6.30	27.70	21.10	
14	8.10	5.50	12.10	8.70	29.80	23.50	
16	8.30	5.80	9.70	7.10	24.20	17.70	56.-
18	9.50	7.30	14.50	10.90			
20	9.-	6.80	11.20	8.20	25.50	18.70	53.20
22	11.10	9.40	17.80	13.50			
25	9.50	7.20	13.-	9.50	26.40	20.10	49.50
30	9.80	7.50	16.80	12.40	30.-	22.50	53.50
35	13.80	10.-	18.30	13.40	33.-	24.80	
40	13.10	9.60	19.80	14.60	39.-	29.75	
45	16.80	12.40	21.40	17.50	42.-	32.-	
50	20.25	14.80	23.80	18.70	44.-	33.50	
55			34.-	25.50			
60	26.-	19.85	28.90	23.-			
70	37.-	28.-					
100	60.50	47.-					