


Cross recessed oval head machine screws, steel type H (Phillips)

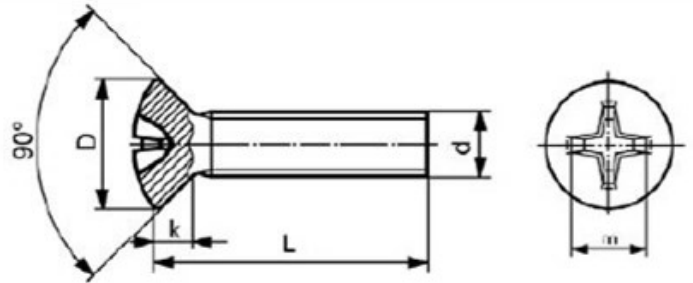


DIN 966

ISO 7047

d	M2,5		M3		M4		M 5	
D	4,7		5,6		7,5		9,2	
k	1,5		1,65		2,2		2,5	
m ≈	2,7		3,1		4,5		5,3	
driver size	1		1		2		2	
L quantity	100	1000+	100	1000+	100	1000+	100	1000+
5	4.-	2.50	5.90	3.90				
6	4.-	2.50	4.-	2.15	5.-	2.80		
8	5.50	3.30	4.-	2.15	5.20	3.20	7.50	5.10
10	5.50	3.30	4.-	2.25	5.20	3.20	7.30	4.90
12	6.-	3.40	4.-	2.40	5.40	3.35	7.30	4.90
(14)			6.60	4.70	8.10	6.20	10.70	7.20
16	6.-	3.95	4.-	2.85	6.-	3.70	9.50	5.80
20	7.-	5.30	5.20	3.25	6.20	4.20	9.80	6.-
25			8.40	5.-	8.60	5.20	10.20	6.70
30			9.90	6.-	10.30	6.50	13.90	9.20
35			13.40	8.80	12.-	8.20	15.10	10.10
40					13.-	8.80	16.10	10.90
45					14.80	10.-	18.40	12.60
50							22.75	16.-



Cross recessed oval head machine screws, steel type H (Phillips)

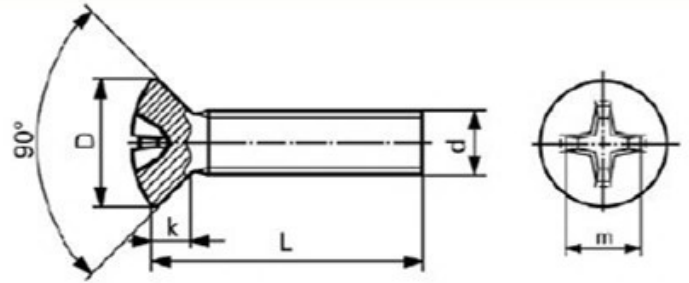

DIN 966

ISO 7047

d	M6		M8	
D	11		14,5	
k	3		4	
m ≈	6,8		9	
driver size	3		4	
L quantity	100	1000+	100	1000+
10	13.90	9.10		
12	11.80	7.50		
(14)	13.60	8.90		
16	12.30	8.30	30.-	21.50
20	14.-	9.50	31.-	21.80
25	16.-	10.90	32.-	22.50
30	17.30	11.80	35.25	25.-
35	19.70	13.60	39.-	27.75
40	21.75	15.10	48.-	34.-
50	27.25	19.40	52.50	37.25
60			58.-	43.50